

Arms adjustment manual

Due to transport or wall condition, it happens that sometimes you have to adjust a little arm height.

If you want to adjust the arm upwards

Step 1 : Leave the blind awning open about 40cm.


Step 2: a person holds the elbow of the arm so that it does not fall when another person loosens the support screws of this arm.


Step 3: another person loosens the 2 arm support screws like the photo below.

Step 4: the person holding the arm, raises his arm a little to the same level as the other arm.

Step 5: Tighten the top screw first, and check that both arms are always level before tightening the bottom screw.

Step 6: Tighten the bottom screw.

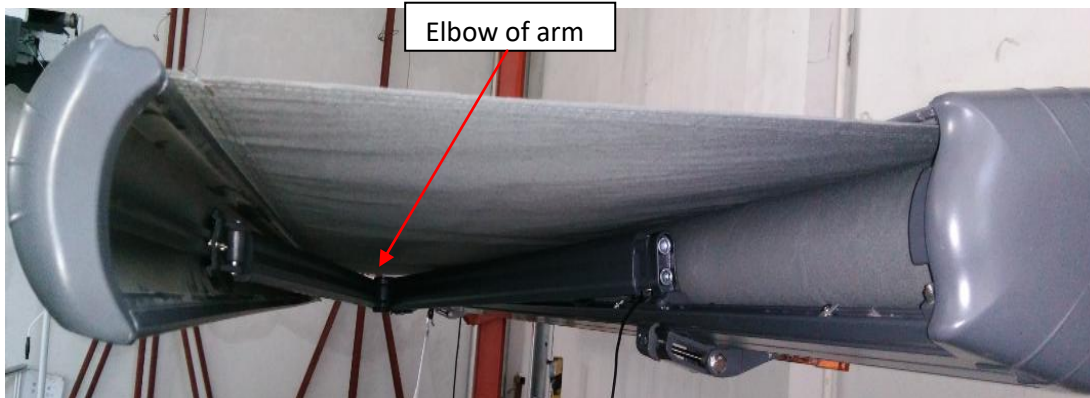

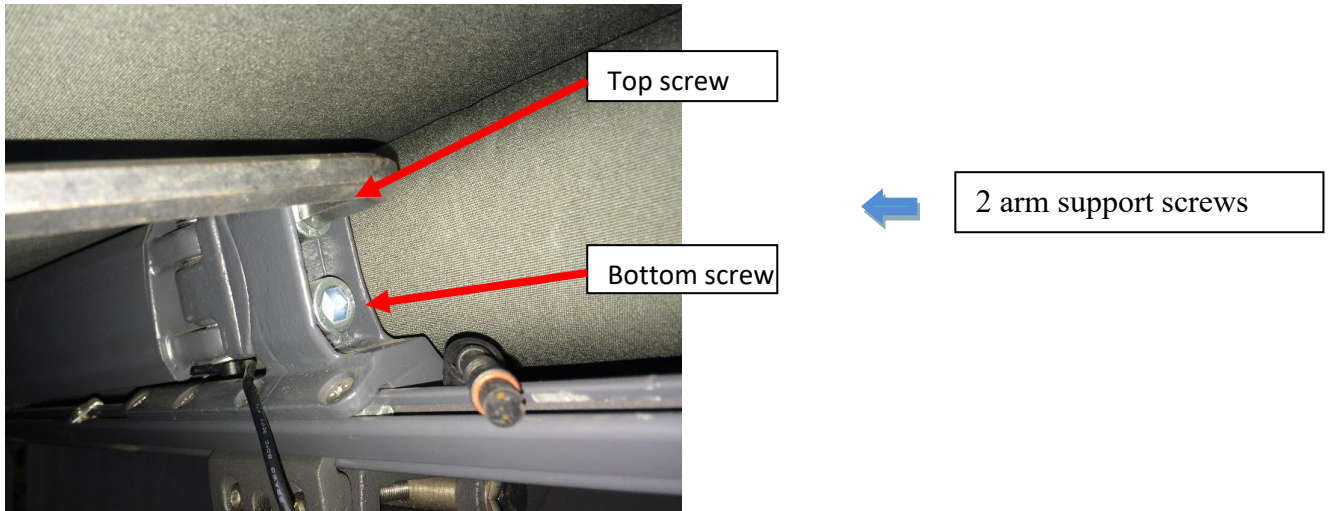

If you want to adjust the arm down :

- Step 1: Leave the blind awning open about 40cm.
- Step 2: a person holds the elbow of the arm for who does not fall when another person loosens the support screws of this arm.
- Step 3: another person loosens the 2 arm support screws like the photo below.
- Step 4: The person holding the arm will lower the arm slightly to the same level as the other arm.
- Step 5: Tighten the bottom screw, and check that both arms are always level before tightening the bottom screw.
- Step 6 Tighten the top screw.

